


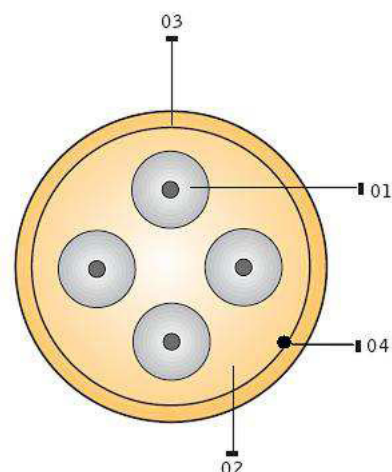

DESCRIPTION

- 01. Tight Buffer Fibre (0.9 mm)
- 02. Fiberglass Reinforcements-WB
- 03. Outer Jacket
- 04. Ripcord

FIRE RESISTANCE

Flame retardant (IEC 60332-3 and 60332-1-2)
 Halogen free (IEC 60754-2-1/-2)
 Low smoke emission (IEC 61034-2)

APPLICATIONS

Universal (Indoor / Outdoor)

RODENT PROTECTION

Rodent Protected

ADVANTAGES

Compact / Lightweight / Flexible / Easy to strip (gel free) / Totally dielectric / Reduced diameter / Direct connectorization / Saves installation costs / Rodent protected.

	SPECIFICATIONS
Fibre count	24
Armour	Reinforced fibreglass yarns WB
Outer jacket	Thermoplastic LSZH ¹
Colour	SM/OS2 - Yellow (RAL 2003) / MM/OM3 – Turquoise (RAL 6027) / MM/OM4 – Blue (RAL 5015) / MM/OM4 – Magenta
Weight (Kg/Km)	65
Outer Ø (mm)	7.9 ± 0.3
Tensile Load Perm / Inst (N)	400 / 800
Crush (N/100mm)	1500
Temperature range	-40°C to +60°C
Min. Bending radius	20 x Outer Ø

Standards

Environmental and mechanical tests according to EN 187000 and IEC 60794-1-2.

¹ LSZH – Halogen free, low smoke and flame retardant thermoplastic compound.

Données Logistiques

Référence : nc

Code Douane : nc

Poids Brut : nc

Dim produit : nc

Dim emballage : nc

Code EAN : nc

Pays d'origine : Chine

Poids Net : nc

Cond produit : nc

Cond emballage : nc